



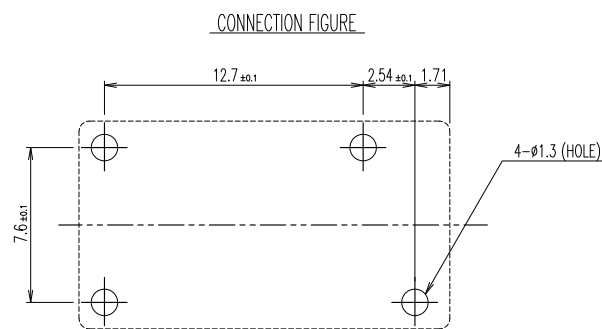


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 – 2.99mm	±0.2mm
3mm min.	±0.3mm

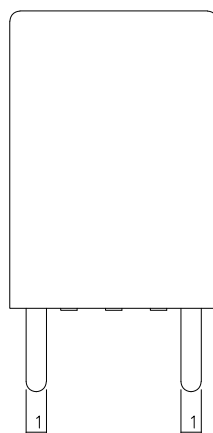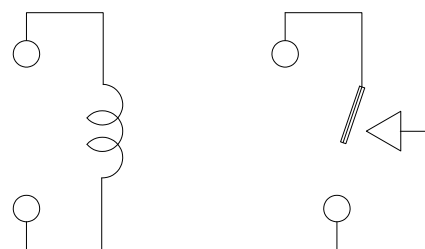

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± 5 PLC ± ANGLES ±		DWN H.SAKAKI		 TE Connectivity	
				CHK Y.OIKAWA			
		APVD A.NAGAI		NAME		0J-SS-LM SPEC,000	
		PRODUCT SPEC SEE PRODUCT SPEC		APPLICATION SPEC		RESTRICTED TO	
MATERIAL 材料		FINISH		WEIGHT		SIZE A3	
				CAGE CODE		DRAWING NO	
				00779		 1461117	
				CUSTOMER DRAWING		SCALE 5:1	
						SHEET 1 OF 2	
						REV D1	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.
© COPYRIGHT

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC
HB

DIST

REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
---	-----	-------------	-----	------	-----	------

B

PART NO	DESCRIPTION	PRODUCT SPEC	PART B	PART A	TYPE
3-1419129-1	QJ-SS-124LM, 000	108-79069	24V	QJ-SS-124LM	f
4-1419144-2	QJ-SS-118LM, 000	—	18V	QJ-SS-118LM	e
2-1419129-1	QJ-SS-112LM, 000	108-79068	12V	QJ-SS-112LM	d
1461117-3	QJ-SS-109LM, 000	108-79067	9V	QJ-SS-109LM	c
1440007-1	QJ-SS-106LM, 000	108-79066	6V	QJ-SS-106LM	b
1440007	QJ-SS-105LM, 000	108-79065	5V	QJ-SS-105LM	a

RELAY TYPE

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		JUEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

DIMENSIONS:
mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES

FINISH

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

 TE Connectivity

NAME
QJ-SS-LM SPEC,000

SIZE
A3

CAGE CODE
00779

DRAWING NO
G- 1461117

RESTRICTED TO

SCALE

SHEET 2 OF 2

REV 01

Downloaded from Elcodis.com electronic components distributor