AP85T03GS/P-HF

Halogen-Free Product

Advanced Power Electronics Corp.

N-CHANNEL ENHANCEMENT MODE POWER MOSFET

- ▼ **Low Gate Charge**
- ▼ **Simple Drive Requirement**
- ▼ **Fast Switching Characteristic**
- ▼ **RoHS Compliant & Halogen-Free**



BV_{DSS}	30V
$R_{DS(ON)}$	6mΩ
I_D	75A



TO-263(S)



TO-220(P)

Description

AP85T03 series are from Advanced Power innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The TO-263 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for high current application due to the low connection resistance. The through-hole version (AP85T03GP) are available for low-profile applications.

Absolute Maximum Ratings@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_C=25℃	Drain Current, V_{GS} @ 10V	75	A
I_D@T_C=100℃	Drain Current, V_{GS} @ 10V	55	A
I_{DM}	Pulsed Drain Current[1]	350	A
P_D@T_C=25℃	Total Power Dissipation	107	W
	Linear Derating Factor	0.7	W/℃
T_{STG}	Storage Temperature Range	-55 to 175	℃
T_J	Operating Junction Temperature Range	-55 to 175	℃

Thermal Data

Symbol	Parameter	Value	Units
Rthj-c	Maximum Thermal Resistance, Junction-case	1.4	℃/W
Rthj-a	Maximum Thermal Resistance, Junction-ambient (PCB mount)[3]	40	℃/W
Rthj-a	Maximum Thermal Resistance, Junction-ambient	62	℃/W

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250uA	30	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25℃, I_D=1mA	-	0.018	-	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=10V, I_D=45A	-	-	6	mΩ
		V_{GS}=4.5V, I_D=30A	-	-	10	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250uA	1	-	3	V
g_{fs}	Forward Transconductance	V_{DS}=10V, I_D=30A	-	55	-	S
I_{DSS}	Drain-Source Leakage Current	V_{DS}=30V, V_{GS}=0V	-	-	1	uA
	Drain-Source Leakage Current (T_j=125°C)	V_{DS}=24V, V_{GS}=0V	-	-	250	uA
I_{GSS}	Gate-Source Leakage	V_{GS}=±20V, V_{DS}=0V	-	-	±100	nA
Q_g	Total Gate Charge	I_D=30A	-	33	52	nC
Q_{gs}	Gate-Source Charge	V_{DS}=24V	-	7.5		nC
Q_{gd}	Gate-Drain ("Miller") Charge	V_{GS}=4.5V	-	24		nC
$t_{d(on)}$	Turn-on Delay Time	V_{DS}=15V	-	11.2	-	ns
t_r	Rise Time	I_D=30A	-	77	-	ns
$t_{d(off)}$	Turn-off Delay Time	R_G=3.3Ω,V_{GS}=10V	-	35	-	ns
t_f	Fall Time	R_D=0.5Ω	-	67	-	ns
C_{iss}	Input Capacitance	V_{GS}=0V	-	2700	4200	pF
C_{oss}	Output Capacitance	V_{DS}=25V	-	550	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	380	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage[2]	I_S=45A, V_{GS}=0V	-	-	1.3	V
t_{rr}	Reverse Recovery Time	I_S=30A, V_{GS}=0V,	-	28	-	ns
Q_{rr}	Reverse Recovery Charge	dI/dt=100A/μs	-	10	-	nC

Notes:

1.Pulse width limited by Max. junction temperature.

2.Pulse width ≤300us , duty cycle ≤2%.

3.Surface mounted on 1 in^2 copper pad of FR4 board

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

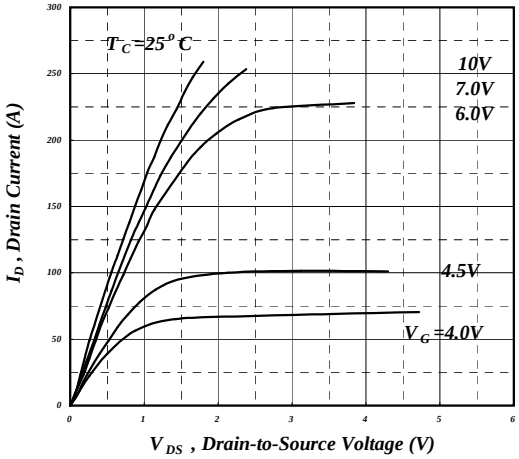

Fig 1. Typical Output Characteristics

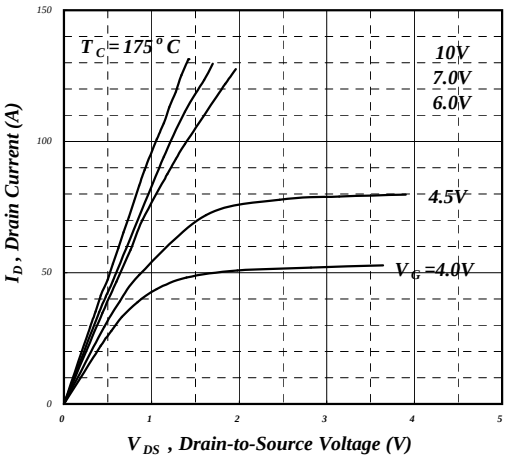

Fig 2. Typical Output Characteristics

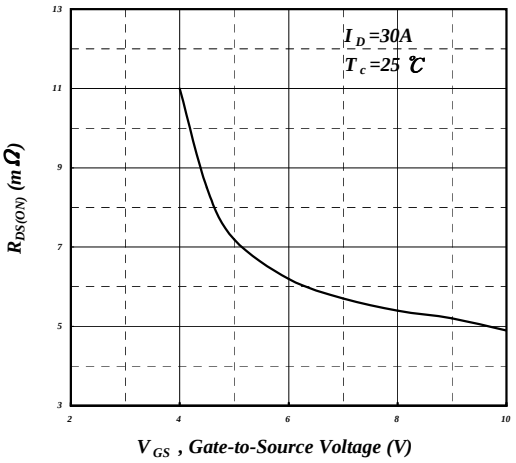

Fig 3. On-Resistance v.s. Gate Voltage

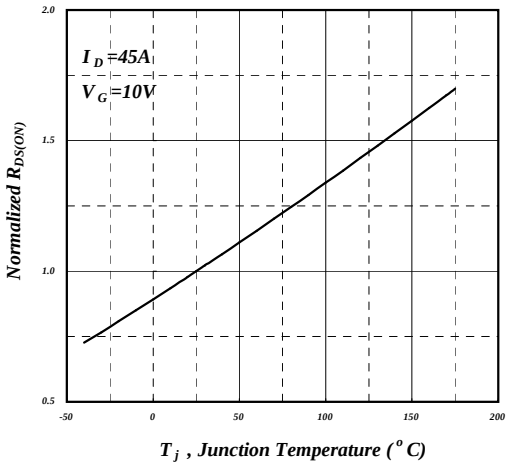

Fig 4. Normalized On-Resistance v.s. Junction Temperature

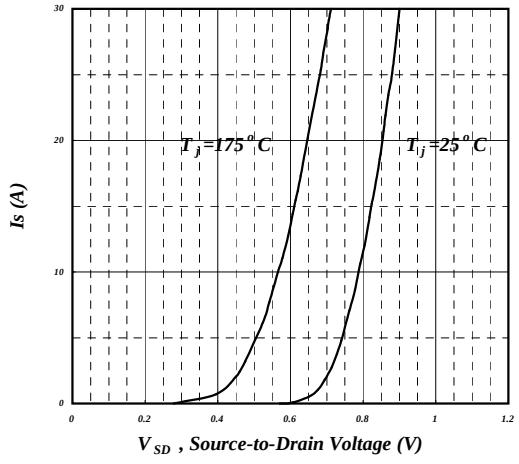

Fig 5. Forward Characteristic of Reverse Diode

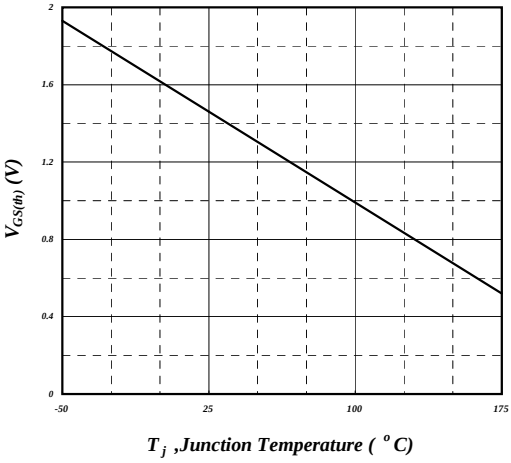

Fig 6. Gate Threshold Voltage v.s. Junction Temperature

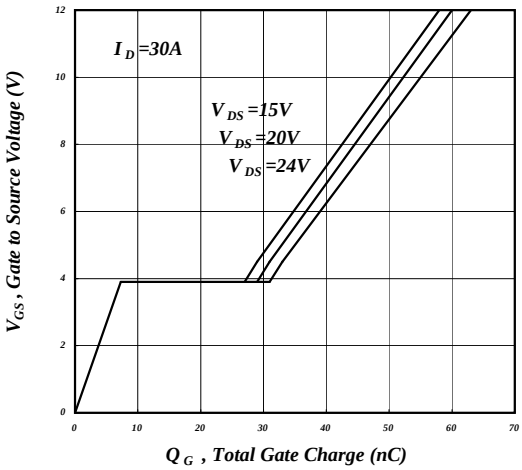

Fig 7. Gate Charge Characteristics

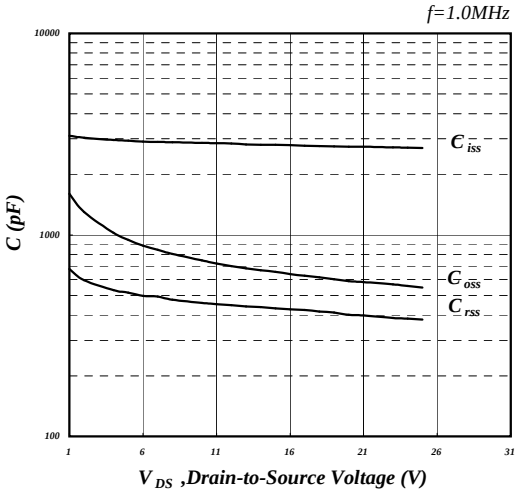

Fig 8. Typical Capacitance Characteristics

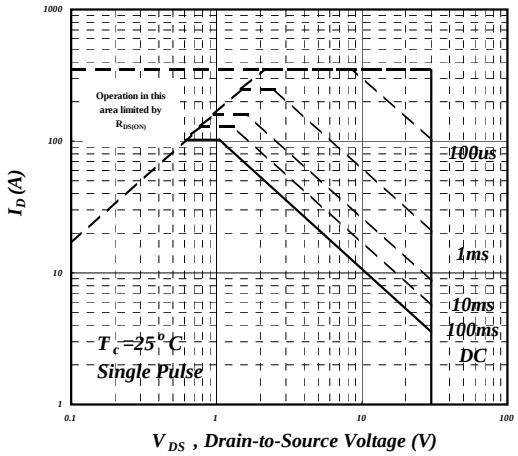

Fig 9. Maximum Safe Operating Area

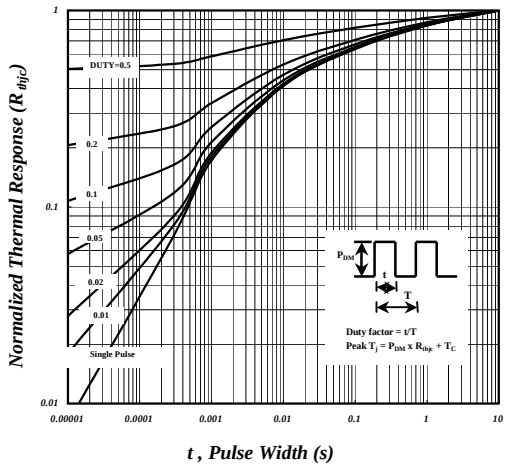

Fig 10. Effective Transient Thermal Impedance

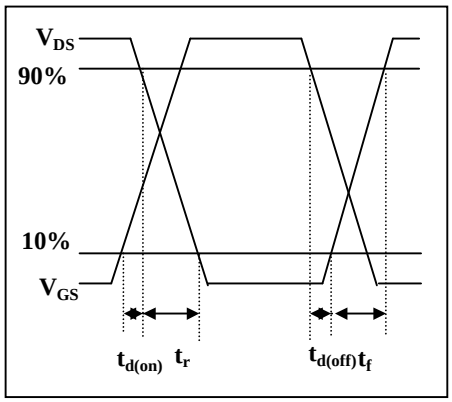

Fig 11. Switching Time Waveform

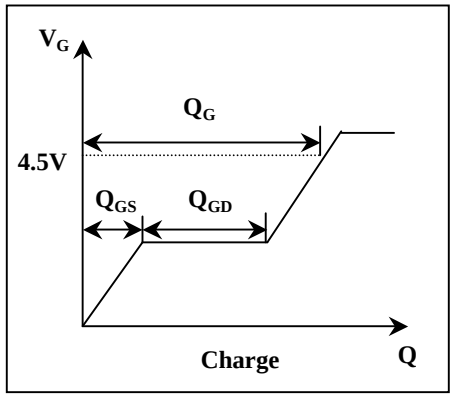

Fig 12. Gate Charge Waveform

MARKING INFORMATION

TO-263

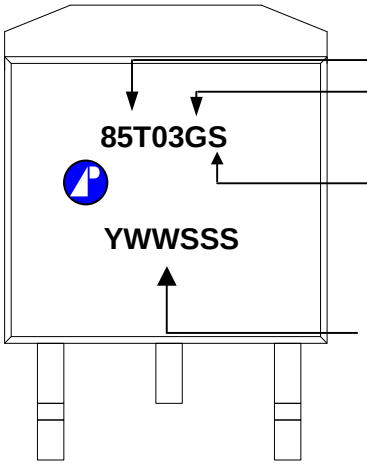

Part Number
meet Rohs requirement
for low voltage MOSFET only
Package Code
Date Code (YWWSSS)
Y：Last Digit Of The Year
WW：Week
SSS：Sequence

TO-220

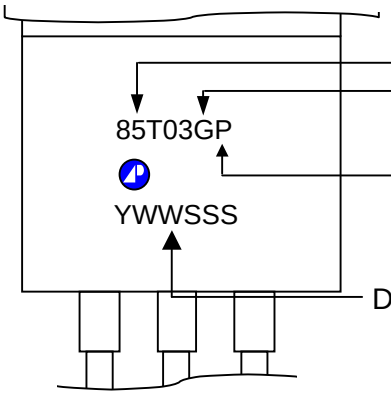

Part Number
meet Rohs requirement
for low voltage MOSFET only
Package Code
Date Code (YWWSSS)
Y：Last Digit Of The Year
WW：Week
SSS：Sequence